



6-GFX-150 12V 3 OPzS 150





Application:

- Solar and wind power system
- Electric power, nuclear power
- Telecommunication
- UPS
- Situation with high environmental protection and energy-saving

Features of performance application

- ✚ Designed service life of 22 years
- ✚ Water supplement cycle 0.25-1 year (normal)
1-2 year (choose water content recombination valve)
- ✚ High cycle service life
- ✚ Better temperature resistance performance
- ✚ Excellent deep cycle performance
- ✚ Superior low current discharge performance
- ✚ Better charge reception capability
- ✚ Better safety performance and reliability
- ✚ Modular and personified installation design
- ✚ Performance/price ratio is high and yearly operating cost is low
- ✚ Environmental friendly, cycle application

Rated voltage	12 V
Capacity@ 25°C(77°F)	150Ah @ 10hr to 10.8V
Weight	Without electrolyte: about 54 kg (118.8 lb) With electrolyte: about 68 kg (149.6 lb)
electrolyte density (charged)	1.240±0.01g/cm ³ (20°C) (68°F)
Reference internal resistance (charged)	About 7.1mΩ@ 25°C(77°F)
Short-circuit current	About 1690A (0.1S reference value)
Max discharge current	450A (5sec)
Self-discharge	< 10% 90 days @ 25°C (77°F)
Temperature range	Application: -20°C~50°C(-4°F~122°F) Storage: 0°C~20°C(32°F~68°F) Recommendation: 20°C~25°C(68°F~77°F)
Max charge current	22.5A
Charge voltage @ 25°C(77°F)	Float charge: 13.38V, average charge: 14.1V Temperature compensation factor: -18 mV/°C
Terminal output	M8 copper terminal (HPb59-1)



Structure features of Shuangdeng 3/6-GFX series acid-proof stationary battery:

- Plate: positive plate adopts tubular type plate which can effectively prevent active substance falling, positive plate frame is made of multi-component alloy, the alloy crystal particle is tiny and dense, the corrosion-resisting performance is good and service life is long. The negative plate adopts pasted plate, grid adopts radiated structure, which enhances utilization ratio of active substance and discharge capability of strong current; moreover, the charge reception capability is strong.
- Battery case: adopt AS transparent case with corrosion prevention, high strength and beautiful appearance, the internal structure and state of battery can be directly observed via transparent case.
- Separator: the combined separator of multi-hole corrugated plastic plate and micro-bore rubber separator has bigger electrolyte storage space, which enhances dispersion speed of electrolyte, greatly reduces internal resistance of battery and prevents dendrite short circuit after deep discharge.
- Terminal sealing: the built-in copper-core lead-based terminal post has strong current carrying capacity and corrosion resistance. The unique terminal post sealing structure can effectively eliminate the stress which is generated due to plate extension, leakage is avoided, sealing reliability of terminal post is ensured and service life of battery is greatly increased.
- Acid resistant bolt: adopt special funnel-shaped acid resistant bolt which can filter acid fume and prevent flame, the density and temperature of electrolyte can be measured directly, use is safe and maintenance is convenient.



Execution standard:

IEC60896-11 DIN40737-3
BS EN 61427-2002
GB/T13337.1
Q/321284KCC 03-2006

Authentication and certificate:

Certificate of Qualification on Perfecting Measurement & Measuring System

GB/T19022-2003

ISO10012:2003、IDT

Quality Management System

Authentication

GB/T19001-2000

NO.03006Q10002R0M-2

Environmental Management System

Authentication

ISO 14001:2004

NO.010607E2024R1M-2

Occupational Health Management

System Authentication

GB/T28001-2001

NO.010607S10147R0M-2

CE authentication

EN 61000-6-3:2001+A11:2004

EN 61000-6-1:2001

National Industrial Product Production

License

XK06-044-00012

Product Quality Test Free Certificate

(2006)GM(321630488)

Export product quality license

Discharge current at different final voltages and different discharge rates unit: A (25°C, 77°F)







	5min	10min	15min	30min	45min	1hr	1.5hr	2hr	3hr	4hr	5hr	8 hr	10 hr	20hr	100 hr	120hr
1.90V	84	77	69	63	53	50	39	36	29	24	21	17	14	7.12	1.77	1.48
1.85V	93	92	89	74	60	59	45	41	32	27	24	17	15	7.83	1.86	1.56
1.80V	123	120	119	96	74	71	50	47	36	30	26	18	16	8.22	1.93	1.61
1.75V	152	144	138	107	84	77	56	50	38	32	27	19	17	8.55	1.98	1.65

Discharge power at different final voltages and different discharge rates unit: W (25°C, 77°F)

	5min	10min	15min	30min	45min	1hr	1.5hr	2hr	3hr	4hr	5hr	8 hr	10 hr	20hr	100 hr	120hr
1.90V	991.2	908.6	814.2	743.4	625.4	590.0	460.2	424.8	342.2	283.2	247.8	200.6	168.0	86.15	21.42	17.91
1.85V	1097.4	1085.6	1050.2	873.2	708.0	696.2	531.0	483.8	377.6	318.6	283.2	200.6	180.0	94.74	22.51	18.88
1.80V	1451.4	1416.0	1404.2	1132.8	873.2	837.8	590.0	554.6	424.8	354.0	306.8	212.4	192.0	99.46	23.35	19.48
1.75V	1793.6	1699.2	1628.4	1262.6	991.2	908.6	660.8	590.0	448.4	377.6	318.6	224.2	204.0	103.46	23.96	19.97



6-GFX-150 12V 3 OPzS 150

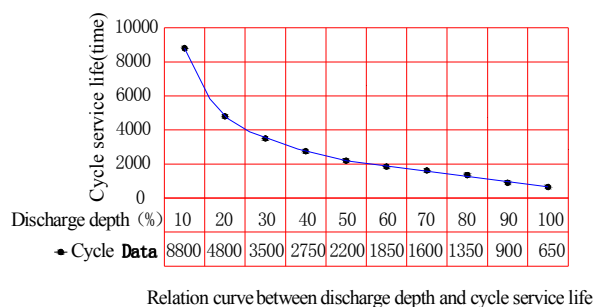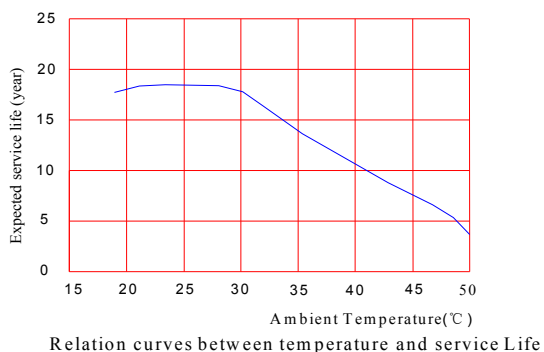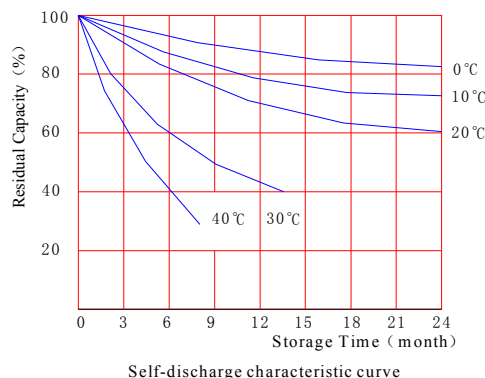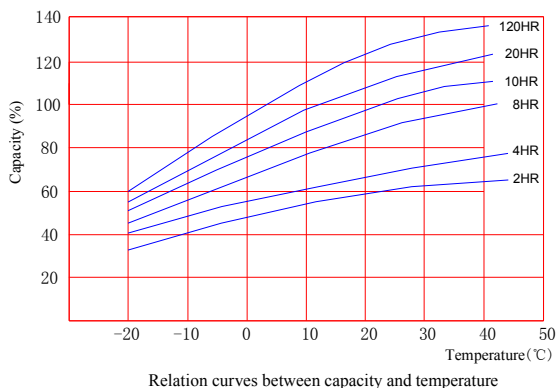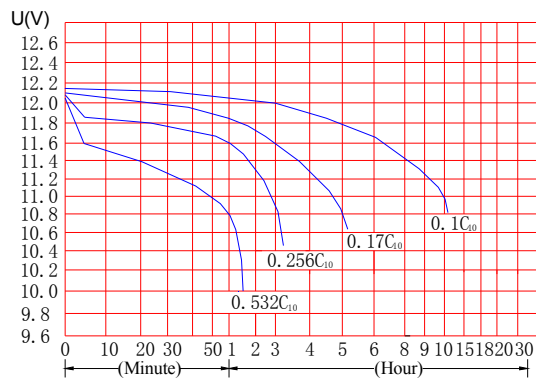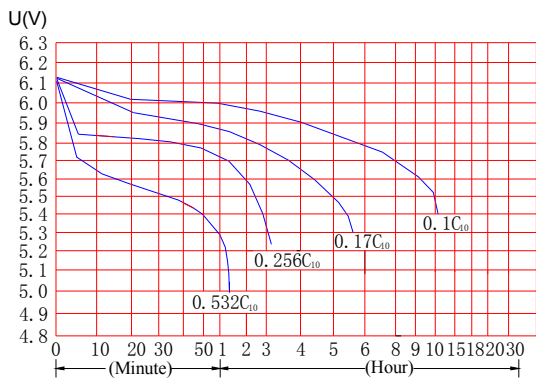

Remark: a) test circumstances: 20-30°C, relative humidity is 50~80percent;
 b) charge mode: electricity of charge is equal to 105~115percent of discharge
 c) residual capacity is 80 percent C₁₀

Free Service Line: +86-4008-899-886
 Fax: +86-25-83176850
 Tel: +86-25-83176860
 E-mail: gjpt@chinashoto.com
 E-mail: joyce.zhong@chinashoto.com
 Web: <http://www.chinashoto.cn/>

Shuangdeng Group promises to provide excellent engineering service for customers, including product solution, installation design and on-site maintenance. The above data is only taken as reference instead of inspection standard. Additional notification won't be available for parameter change due to improvement and regulation of product. Inspection shall be performed in accordance with standards. We must make a statement, when the battery service life and safe operating performance is confirmed, the test condition will be stricter; accordingly, the battery shall not be used in these conditions, because it's difficult for battery to reach expected service life.