



GFX-800 8 OPzS 800





Application:

- Solar and wind power system
- Electric power, nuclear power
- Telecommunication
- UPS
- Marine

Features of performance application

- ✚ Designed service life of 22 years
- ✚ Supplement water period is 0.25-1 year (normal) 1-2 year (choose water content recombination valve)
- ✚ High cycle service life
- ✚ Wide operation temperature range
- ✚ Excellent deep cycle performance
- ✚ Superior low current discharge performance
- ✚ Better safety performance and reliability
- ✚ Modular and installation design
- ✚ Performance/price ratio is high and yearly operating cost is low
- ✚ Environmental friendly

Rated voltage	2 V
Capacity@ 25°C(77°F)	800Ah @ 10hr to 1.80V per cell
Weight	Without electrolyte: about 48 kg (105.6 lb) With electrolyte: about 64 kg (140.8 lb)
electrolyte density (charged)	1.240±0.01g/cm ³ (20°C) (68°F)
Reference internal resistance (charged)	About 0.41mΩ@ 25°C(77°F)
Short-circuit current	About 4732A (0.1S reference value)
Max discharge current	2400A (5sec)
Self-discharge	< 10% 90 days @ 25°C (77°F)
Temperature range	Application: -20°C ~ 50°C(-4°F ~ 122°F) Storage: 0°C~20°C(32°F~68°F) Recommendation: 20°C~25°C(68°F~77°F)
Max charge current	120A
Charge voltage @ 25°C(77°F)	Float charge: 2.23V, average charge: 2.35V Temperature compensation factor: -3 mV/°C
Terminal output	M10 copper terminal (HPb59-1)

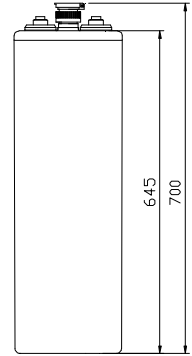

Execution standard:

IEC60896-11 DIN40736
BS EN 61427-2002
GB/T13337.1
Q/321284KCC 03-2006

Authentication and certificate:

Certificate of Qualification on Perfecting Measurement & Measuring System

GB/T19022-2003

ISO10012:2003、IDT

Quality Management System

Authentication

GB/T19001-2000

NO.03006Q10002R0M-2

Environmental Management System

Authentication

ISO 14001:2004

NO.010607E2024R1M-2

Occupational Health Management

System Authentication

GB/T28001-2001

NO.010607S10147R0M-2

CE authentication

EN 61000-6-3:2001+A11:2004

EN 61000-6-1:2001

National Industrial Product Production License

XK06-044-00012

XK06-044-00012



Structure features of Shuangdeng GFX series acid-proof stationary battery:

- Plate: positive plate adopts tubular type plate which can effectively prevent active substance falling, positive plate frame is made of complex alloy, the alloy crystal particle is tiny and dense, the corrosion-resisting performance is good and service life is long. The negative plate adopts pasted plate, grid adopts radiated structure, which enhances utilization ratio of active substance and discharge capability of strong current; moreover, the charge reception capability is strong.
- Battery case: adopt AS transparent case with corrosion prevention, high strength and beautiful appearance, the internal structure and state of battery can be directly observed via transparent case.
- Separator: the combined separator of multi-hole corrugated plastic plate and micro-bore rubber separator have bigger electrolyte storage space, which enhances dispersion speed of electrolyte, greatly reduces internal resistance of battery and prevents dendrite short circuit after deep discharge.
- Terminal sealing: the built-in copper-core lead-based terminal post has strong current carrying capacity and corrosion resistance. The unique terminal post sealing structure can effectively eliminate the stress which is generated due to plate extension, leakage is avoided, sealing reliability of terminal post is ensured and service life of battery is greatly increased.
- Acid resistant bolt: adopt special funnel-shaped acid resistant bolt which can filter acid fume and prevent flame, the density and temperature of electrolyte can be measured directly, use is safe and maintenance is convenient.

Discharge current at different final voltages and different discharge rates unit: A (25°C, 77°F)





	5min	10min	15min	30min	45min	1hr	1.5hr	2hr	3hr	4hr	5hr	8 hr	10 hr	20hr	100 hr	120hr
1.90V	345	313	285	280	264	259	216	202	151	128	111	82	73	40.62	10.98	9.18
1.85V	373	357	351	349	303	294	248	224	167	141	122	87	76	44.68	11.56	9.66
1.80V	551	528	517	444	355	349	256	244	201	160	139	99	82	46.91	11.96	10.00
1.75V	661	634	614	509	405	398	287	264	204	167	142	100	87	48.79	12.26	10.25

Discharge power at different final voltages and different discharge rates unit: W (25°C, 77°F)


	5min	10min	15min	30min	45min	1hr	1.5hr	2hr	3hr	4hr	5hr	8 hr	10 hr	20hr	100hr	120hr
1.90V	619	563	506	489	475	460	430	400	329	278	239	174	150	81.24	21.96	18.36
1.85V	669	642	623	608	566	523	487	451	368	308	265	190	164	88.47	22.89	19.13
1.80V	1068	1025	879	814	751	687	618	549	437	358	304	213	182	91.94	23.44	19.60
1.75V	1282	1230	901	818	755	692	608	524	464	380	317	217	184	94.16	23.66	19.78



GFX-800 8 OPzS 800

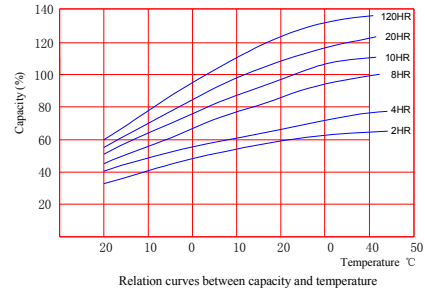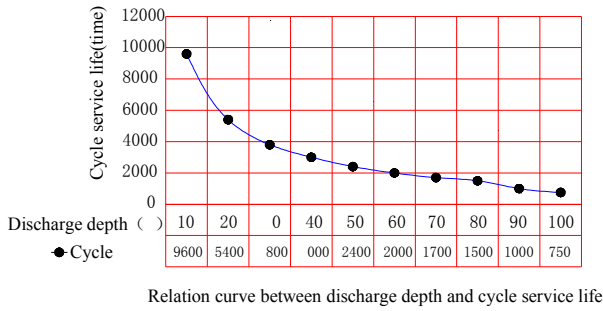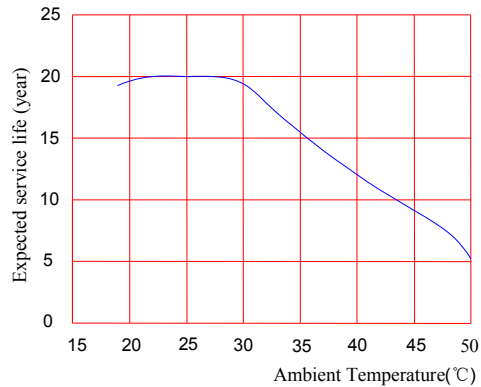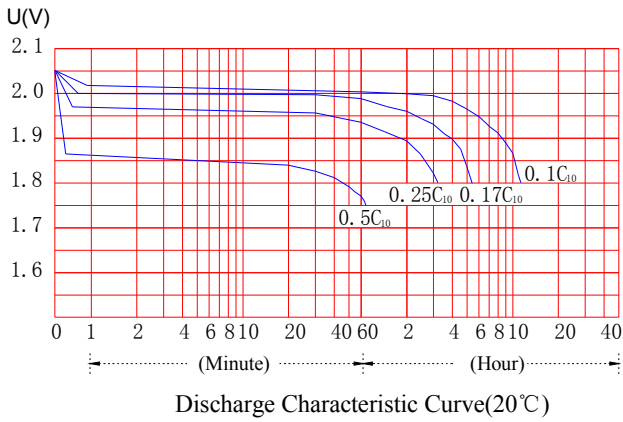

Remark: a) test circumstances: 20-30°C, relative humidity is 50~80percent;
b) charge mode: electricity of charge is equal to 105~115percent of discharge
c) residual capacity is 80 percent C₁₀

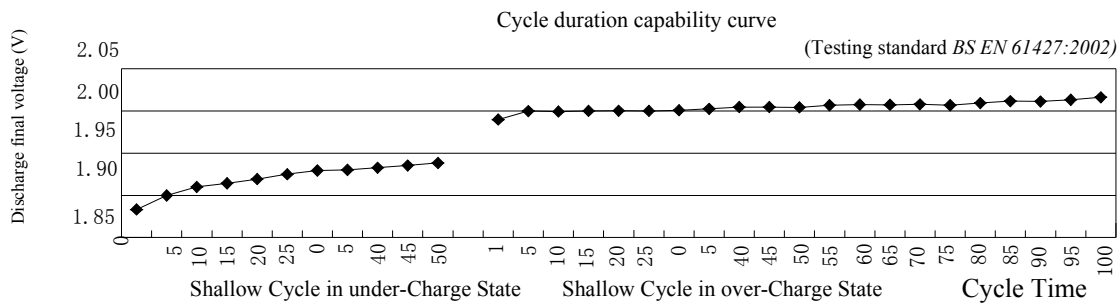

Free Service Line: +86-4008-899-886
Fax: +86-25-83176850
Tel: +86-25-83176860
E-mail: gjpt@chinashoto.com
E-mail: joyce.zhong@chinashoto.com
Web: <http://www.chinashoto.cn/>

Shuangdeng Group promises to provide excellent engineering service for customers, including product solution, installation design and on-site maintenance.

The above data is only taken as reference instead of inspection standard. Additional notification won't be available for parameter change due to improvement and regulation of product. Inspection shall be performed in accordance with standards.

We must make a statement, when the battery service life and safe operating performance is confirmed, the test condition will be stricter; accordingly, the battery shall not be used in these conditions, because it's difficult for battery to reach expected service life.